AD NUMBER
AD495829
LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 03 OCT 1952. Other requests shall be referred to Office of Naval Research, Washington, DC.

AUTHORITY

onr ltr, 26 oct 1977

U-24898

EFFECT OF CHARGE RADIUS ON DETONATION VELOCITY

R. B. PARLIN AND D. W. ROBINSON

TECHNICAL REPORT
NUMBER VII
OCTOBER 3, 1952

CONTRACT NUMBER
N7 - onr - 45107
PROJECT NUMBER
357 - 239

NOV 12 1952

INSTITUTE FOR THE STUDY OF RATE PROCESSES
UNIVERSITY OF UTAH
SALT LAKE CITY

EFFECT OF CHARGE RADIUS ON
DETONATION VELOCITY.

R. B. Parlin and D. W. Robinson

Institute for the Study of Rate Processes

University of Utah

Salt Lake City

EFFECT OF CHARGE RADIUS ON DETONATION VELOCITY

R. B. Parlin and D. W. Robinson

Abstract

The derivation of the detonation velocity of an ideal wave in
an imperfect gas obeying the equation of state of the form

$$pv = nRTe^{(k/v)}$$

is given. Assuming the curved-front theory, the effect of radial
expansion on the velocity of propagation of a non-ideal detonation
wave is treated using the above equation of state. The significant
approximations involved are discussed and the final equations are
given in a form easily applied to experimental data. The results of
this study suggest that longer reaction zone lengths than those
previously obtained using a constant co-volume may be appropriate.

-1-

EFFECT OF CHARGE RADIUS ON DETONATION VELOCITY

R. B. Parlin and D. W. Robinson

1. A qualitative discussion of the curved-front theory is given
in Chem. Rev. 45, 69 (1949) (Eyring, Duffy, Powell and Parlin) and
in Technical Report No. I (January 1, 1952) (Parlin, Thorne and
Robinson). Reference for complete details of this theory should be
made to these reports. Briefly, however, the theory explains the
observed decrease in detonation velocity arising from a reduction
in the radius of the charge. Consider a detonation wave propagating
along a charge of radius $\underline{R}$ and of infinite length. Due to the ex-
panding gas front, a rarefaction wave is sent into the reaction
zone. Such a rarefaction wave will overtake the front of the wave,
giving rise to a reduction in its velocity and a curvature of the
detonation front.

2. Before proceeding with a general analysis of the curved-
front theory, let us derive the detonation velocity of an ideal wave
in an imperfect gas, assuming an equation of state of the form

$$pv = nRTe^x \qquad (2.1)$$

where

$$x = K/v. \qquad (2.2)$$

Previous studies have used a constant co-volume equation of state.

This derivation results from a simultaneous solution of the
hydrodynamic equations. The equation of continuity for a plane
wave is

$$U/D = v/v_o \qquad (2.3)$$

and the equation of motion is

$$p + U^2/v = D^2/v_o + p_o \qquad (2.4)$$

Furthermore, the equation of energy conservation is

$$\Delta E + pv + 1/2\, U^2 = \Delta Q + 1/2\, D^2 + p_o v_o \qquad (2.5)$$

where

$$\Delta E = \overline{C}_v \ (T - T_o) = \overline{C}_v \ (pv/nRe^x - T_o) \tag{2.6}$$

and $C_v = \dfrac{\int_{T_o}^{T} C_v dT}{T - T_o}$, since the internal pressure $p_i = T \left(\dfrac{dp}{dT}\right)_v - p$ is

zero by equation (2.1).

Substituting (2.6) into (2.5),

$$L'pv + 1/2 \ (U^2 - D^2) = Q \tag{2.7}$$

where

$$Q = \Delta Q + \overline{C}_v T_o \tag{2.8a}$$

and

$$L' = \overline{C}_v/nRe^x + 1 \tag{2.8b}$$

and where p_o is assumed to be negligible compared to p. The

Chapman Jouguet condition is

$$D = v_o \sqrt{-\left(\dfrac{dp}{dv}\right)_S} \ . \tag{2.9}$$

Differentiating (2.1) with respect to v, and using the thermo-
dynamic relations

$$\left(\dfrac{dT}{dv}\right)_S = -\dfrac{p}{C_v} \ , \ \left(\dfrac{dx}{dv}\right)_S = -\dfrac{x}{v}$$

we have

$$\left(\dfrac{dp}{dv}\right)_S = -\dfrac{p}{v}\dfrac{1}{L}$$

where

$$1/L = 1 + nRe^x/C_v + x \tag{2.10}$$

Hence, by (2.9),

$$D^2/v_o^2 = p/vL \tag{2.11}$$

From (2.3), (2.4) and (2.11)

$$D^2/p = v_o/(1 - v/v_o) = v_o^2/vL$$

or

$$v/v_o = 1/(1+L) \qquad (2.12)$$

For the explosive EDNA, the ratio of v/v_o given by (2.12) has been calculated as follows for x in the range 0.8 to 2.2, using C_v and $\underline{n}$ data obtained in Technical Report No. VI.

x	0.8	1.0	1.2	1.6	1.6	2.8	2.0	2.2
v/v_o	0.708	0.724	0.745	0.763	0.778	0.792	0.805	0.815

This illustration indicates the degree of error introduced by the approximation

$$v/v_o = 3/4, \qquad (2.13)$$

which will be assumed reasonable for most solid explosives and used in this discussion.

Also, from 2.7, using 2.3, 2.11 and 2.12,

$$(L'L + 1/2)\,(1+L)^{-2} - 1/2 = Q/D_i^2$$

where D_i is the ideal detonation velocity.

3. Let us know proceed to analyze the non-ideal detonation wave under the assumptions of the curved-front theory. Assume as a first-order approximation that any small region of the wave-front is spherical. Then the normal detonation velocity D may be calculated from the conservation equations appropriate to a spherical detonation wave with r_o the local radius of curvature.

If α is the angle the normal makes with the axis of propagation and if the wave proceeds without a change of shape (steady-state)

$$D = D_o \cos \alpha$$

where D_o is the propagation velocity of the wave itself.

Integration of the differential equation of continuity for a spherical shock leads to

$$U/D = v\,\Theta/v_o \qquad (3.1)$$

where

$$\theta = 1 + 2 \frac{v_o}{D} \int_{r_o}^{r_o-a_o} \frac{W}{vr} dr. \tag{3.2}$$

Here D is the normal detonation velocity, W the particle velocity, v the specific volume of the reaction products, r the radial distance coordinate, r_o the radius of curvature, and a_o the (constant) length of the reaction zone. Using (2.13) and assuming the relation $W/D = 1-v/v_o$ appropriate to a plane wave, by integration of (3.2) we have the approximation

$$\theta = 1 + 2/3 \ln (1 - \frac{a_o}{r_o}). \tag{3.3}$$

Using (3.1), the equation of motion for a plane wave in a steady-state can be written

$$p + \frac{(1+\theta^2)}{2\theta^2} \frac{U^2}{v} = \frac{D^2}{v_o}. \tag{3.4}$$

The equation of energy and the Chapman-Jouguet conditions are given in Section 2. In solving these four hydrodynamic relations for D, let

$$z = pv/D^2, \quad b = v/v_o, \quad \text{and} \quad \omega = U/D$$

then,

$$\omega = b\theta \tag{3.5}$$

$$z + \frac{1+\theta^2}{2\theta^2} \omega^2 = b \tag{3.6}$$

$$L'z + 1/2 (\omega^2 - 1) = Q/D^2 \tag{3.7}$$

$$b^2 L = z \tag{3.8}$$

By (3.5), (3.6) and (3.8),

$$b = \frac{2}{2L + (1 + \theta^2)} \qquad (3.9)$$

If Now we set

$$2\varphi = 1 - \theta^2, \qquad (3.10)$$

then (3.9) becomes

$$b = \frac{1}{1 + L - \varphi} . \qquad (3.11)$$

By (3.8) and (3.11),

$$z = \frac{L}{(1 + L - \varphi)^2} \qquad (3.12)$$

Also,

$$\omega^2 = \frac{1 - 2\varphi}{(1 + L - \varphi)^2} \qquad (3.13)$$

Substituting (3.12) and (3.13) into (3.7),

$$(LL' + 1/2 (1 - 2\varphi)) \frac{1}{(1 + L - \varphi)^2} - 1/2 = {}^{C}/_{D^2} ,$$

or

$$A + L\varphi - 1/2 \varphi^2 = (1 + L - \varphi)^2 {}^{Q}/_{D^2} , \qquad (3.14)$$

where

$$A = L (L' - 1 - 1/2 L). \qquad (3.15)$$

Under ideal conditions, $\varphi = 0$, i.e.,

$$A = (1 + L)^2 Q/D_i^2$$

Hence, from (3.14),

$$1 + \frac{L}{A}\,\varphi - \frac{1}{2A}\,\varphi^2 = \frac{(1+L-\varphi)^2}{(1+L)^2}\;\frac{D_i^2}{D^2}\,. \tag{3.16}$$

For small values of φ, a good approximation to (3.16) is

$$\frac{D}{D_i} = \frac{1-M'\varphi}{1+N'\varphi} \tag{3.17}$$

where

$$M' = 1/(1+L), \quad N' = \frac{1}{2(L'-1)-L} \tag{3.18}$$

As an example of the percentage error involved in the approximation of equation (3.17), consider the case of $x = 1.8$, $C_v = 0.44$, $\overline{C}_v = 0.38$ and $n = 34.94$ for the composition EDNA. The error is less than 2 per cent for φ less than 0.1, which corresponds to greater than 0.9 (and less, of course, than 1.0).

4. In order to determine the shape of the detonation front, it is sufficient to find a parametric representation of the cross-section of the front, recognizing the symmetry of the wave around the axis of the charge (see Fig. 1). For any point of the front, the radius of curvature is given by $r_o = ds/d\alpha$, where s is the distance measured along the front, and α the angle the normal makes with the wave-front. Also, from (3.3) and (3.10),

$$\varphi = -\,2/3\,\ln\left(1 - \frac{a_o}{r_o}\right)\cdot\left(1 + 1/3\,\ln\left(1 - \frac{a_o}{r_o}\right)\right)$$

A plot of this function (Fig. 2), gives a good linear approximation in the form

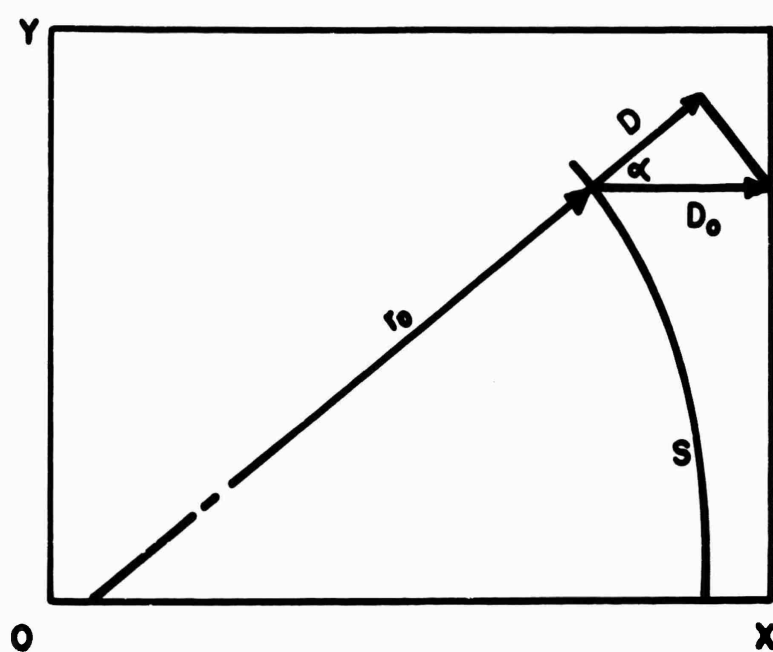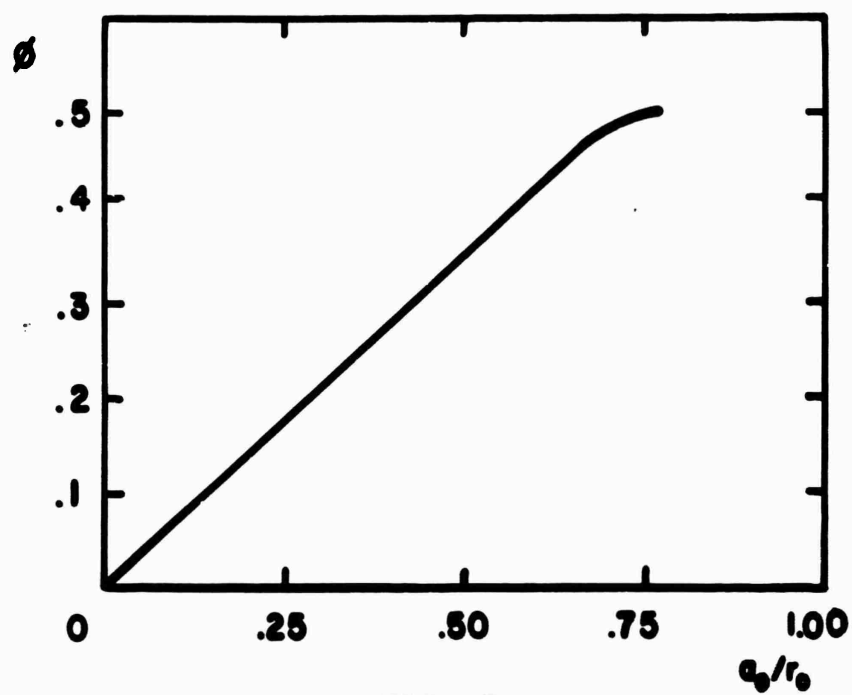$$\varphi = 0.7\,a_o/r_o \tag{4.1}$$

for $a_o/r_o < 0.75$.

FIG. 1

FIG. 2

If $D_o/D_i = \delta$, then since $D = D_o \cos \alpha$, by using Eq. (3.17),

$$D/D_i = \delta \cos \alpha = \frac{1 - a_o M \, d\alpha/dS}{1 + a_o N \, d\alpha/dS} \tag{4.2}$$

where $M = 0.7 M'$, and $N = 0.7 N'$. Proceeding as in Technical Report No. 1, we obtain

$$y = a_o((M+N)K_\alpha - N \sin \alpha) \tag{4.3}$$

$$x = -a_o \left(\frac{M+N}{\delta} \ln \frac{1 - \delta \cos \alpha}{1 - \delta} - \delta(1 - \cos \alpha) \right)$$

where

$$K_\alpha = \frac{2}{\delta \sqrt{1-\delta^2}} \tan^{-1} \left(\sqrt{\frac{1+\delta}{1-\delta}} \cdot \tan \frac{\alpha}{2} \right) - \frac{\alpha}{\delta} \tag{4.4}$$

Equations (4.3) give the parametric representation of the wave front. For the case of a solid explosive surrounded by air, the final angle can be taken to the $\pi/2$. For this case we have,

$$y_c/\alpha = (M+N)K_c - N \tag{4.5}$$

where

$$K_c = \frac{2}{\delta \sqrt{1-\delta^2}} \tan^{-1} \sqrt{\frac{1+\delta}{1-\delta}} - \frac{\pi}{2\delta} \tag{4.6}$$

The universal function K_c is given in the following table.

δ	K_c	δ	K_c
0.000	1.00	.850	3.93
.200	1.19	.875	4.44
.300	1.32	.900	5.11
.400	1.45	.925	6.13
.500	1.69	.950	7.86
.600	1.99	.975	11.86
.700	2.45	.990	19.90
.750	2.78	.994	26.32
.800	3.24	.997	3ṛ.12

As an illustration, using theoretical data for the composition EDNA as given in Technical Report No. VI, the following results are obtained. Figure 3 is a plot of the ratios D_o/D_i to a_o/y_c for various densities.

ρ_o	δ	0.997	0.994	0.990	0.975	0.950	0.900	0.850	0.750
1.58	a_o/r_o	0.022	0.032	0.042	0.072	0.11	0.18	0.24	0.36
1.20		0.025	0.037	0.049	.084	0.13	.21	0.28	0.42
0.93		0.028	0.041	0.055	.094	0.15	.23	0.31	0.46

The relationship of D_o/D_i to a_o/y_c is often approximated linearly. Such an approximation introduces about a five per cent error for ideal conditions, as can be seen by a linear continuation of the curves in Figure 3.
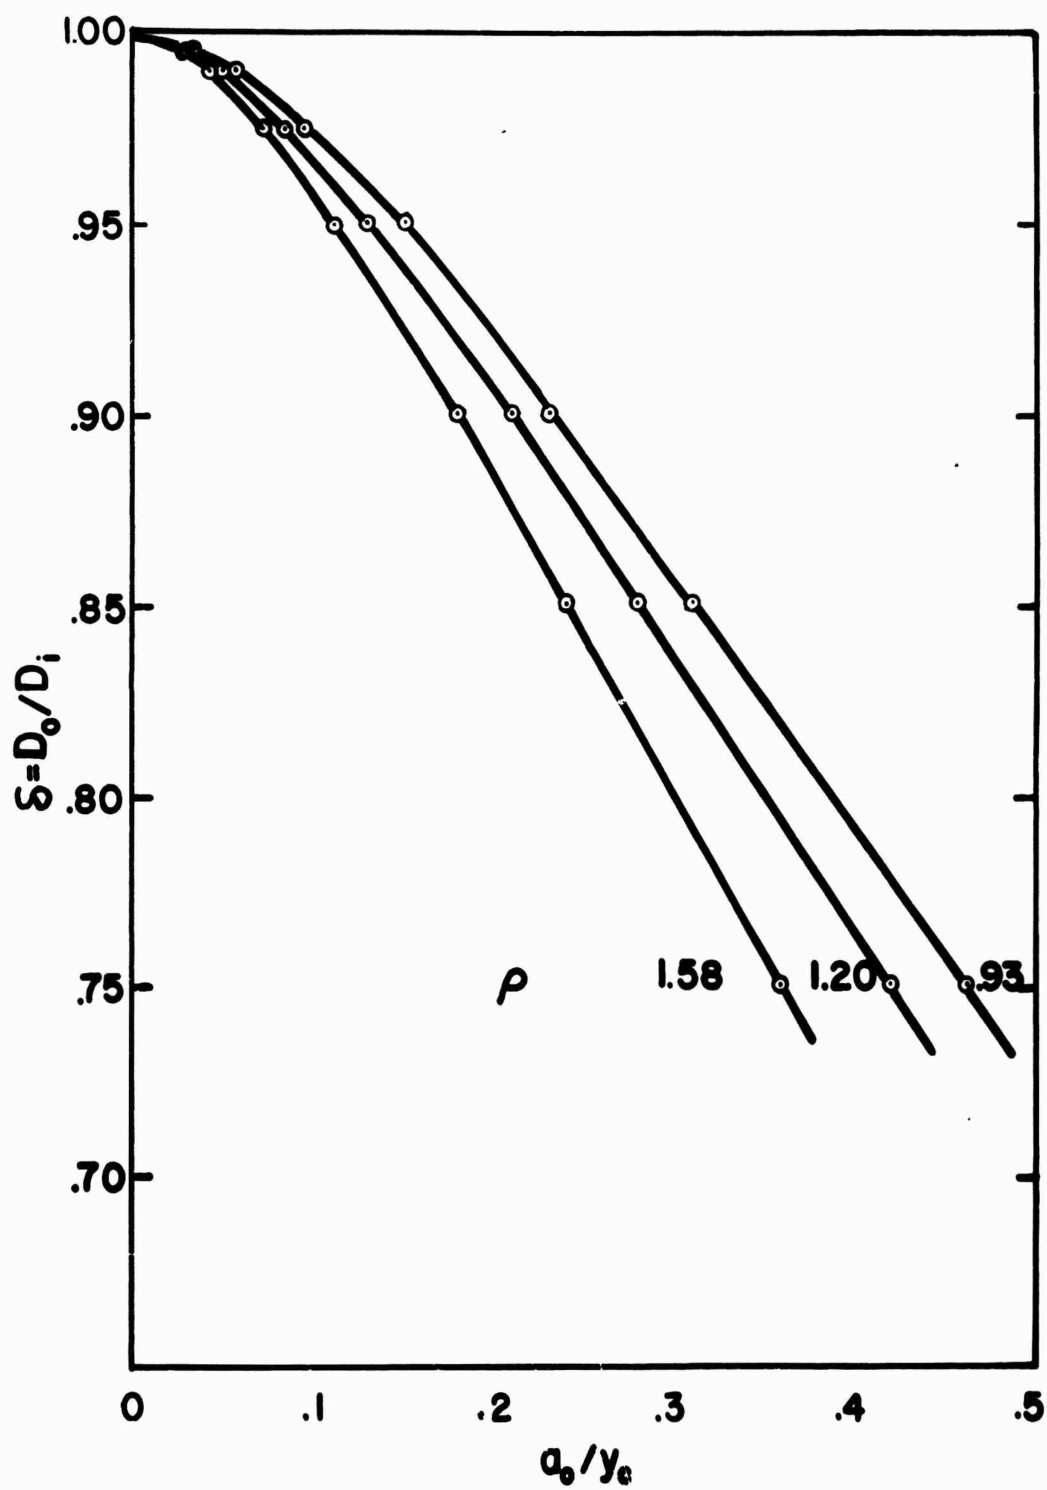
FIG. 3